


PIC Wire & Cable <i>A Division of the Angelus Corporation</i> Ph 262-246-0500 Fax 262-246-0450 PO Box 330 Sussex, WI 53089	Connector Specification	110437
	Approved <i>MEJ</i>	Date 06/8/10
	Distribution : USER	Rev. 1 (06/25/13) Uncontrolled Document

TNC Panel Jack
for S29124

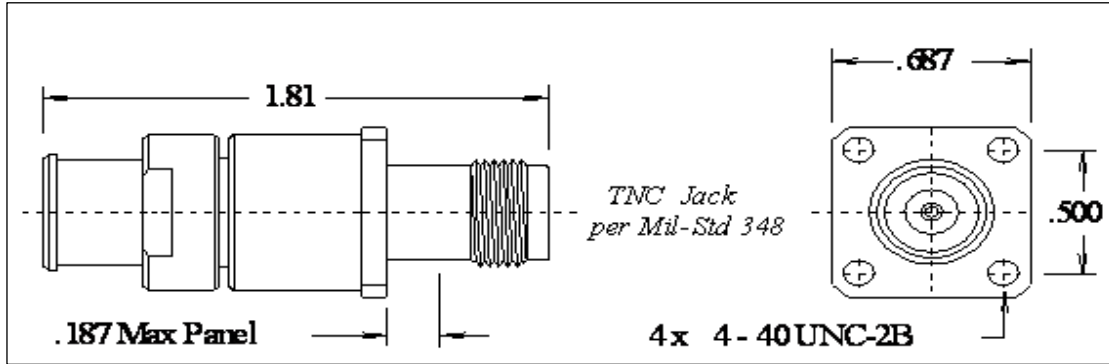

PERFORMANCE

Nominal Impedance 50 Ohms
Temperature Rating - 65° to + 200° C

CONNECTOR WEIGHT (Each)

1.30 ounces (36.97 grams)

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION

Recommended Jam Nut Torque - 35 to 40 in. lbs.

Crimp Tooling:

Solder-on Termination

CONSTRUCTION

Materials:

Body	Stainless Steel
Insulator	PTFE
Center Contact	Beryllium Copper

Finish :

Body	Passivated
Center Contact	Gold

<i>Applicable Standards</i>	MIL-STD 348A MIL-C-39012
-----------------------------	-----------------------------

Notes :

1) Please refer to T-110437 Termination Instruction sheet for strip dimensions & instructions.

