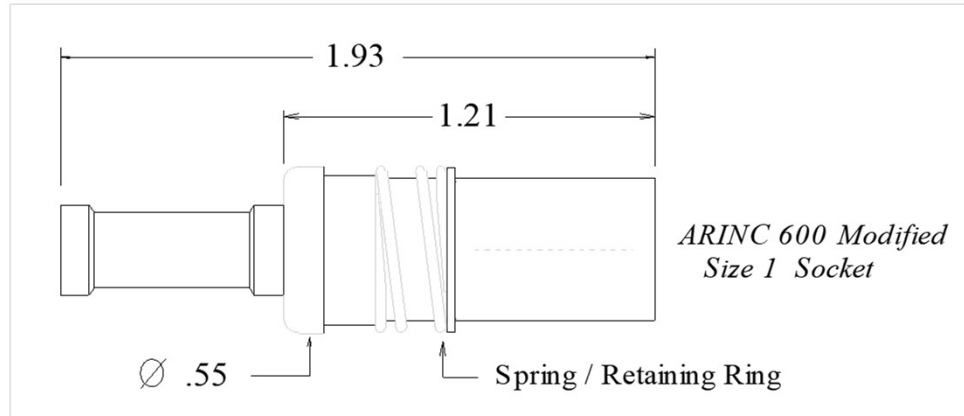


ARINC 600 Modified Size 1 Socket Contact

for S44191, S44193, S46191
 or RG400, RG142

**PERFORMANCE**

Impedance (nom)	50 Ohms
Frequency Range	0 - 5 GHz
Voltage Rating	1000 V(rms)
Insulation Resistance (min)	5000 Megohms
DWV	2500 V(rms)
VSWR (Max)	1.7:1
Insertion Loss (Max)	0.3 dB

CONNECTOR WEIGHT (Each)

0.74 ounces (20.98 grams)

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION**Pic Die Set****Center Contact**

M22520 / 5 - 01 Tool,
 PIC 190118 Hex Crimp Die
 (.098 hex)

Crimp Ferrule

M22520 / 5 - 01 Tool,
 PIC 190118 Hex Crimp Die
 (.213/.261 hex)

MIL Spec Die Set**Center Contact**

M22520 / 5-01 Tool,
 MIL Spec *M22520 / 5-57
 (.100 B hex)

Crimp Ferrule

M22520 / 5-01 Tool,
 MIL Spec *M22520 / 5-57
 (.213 A hex)

* Note - MIL Spec die to be used on the smaller diameter area of ferrule only. Not the larger "Bell" areas on each end.

CONSTRUCTION**Materials:**

Body	Brass, ASTM-B16, Alloy UNS 36000, H02
Center Contact	Beryllium Copper, ASTM-B196, Alloy UNS C17300
Ferrule	Brass, ASTM-B16, Alloy UNS 36000, Dead Soft, Weatherseals included
Dielectric	TFE Fluorocarbon, ASTM-D1710, Type 1, Grade 1
Spring, Retaining Ring	Stainless Steel

Finish :

Body, Ferrule	Gold
Center Contact	Gold
Spring, Retaining Ring	Passivated

APPLICABLE STANDARDS

ARINC 600

Notes:

- 1) A 1.5" piece of Raychem ATUM heat shrink P/N ATUM-16/4-0 provided with connector for purpose of strain relief & moisture protection.
- 2) Please refer to T-190XXX Termination Instruction