
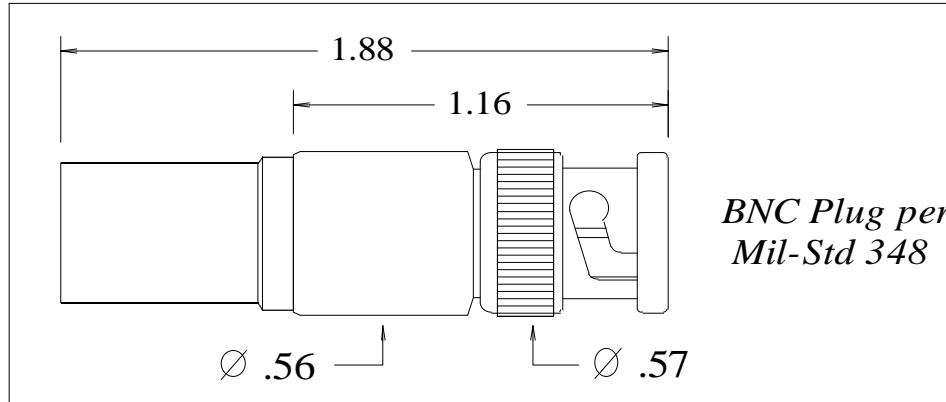


| | | |
|--|---|------------------------------------|
| PIC Wire & Cable | Connector Specification | P/N 190212 |
| A Division of the Angelus Corporation Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com PO Box 330 Sussex, WI 53089 | Approved :  | Date 10/23/03 Rev. 3 (06/16/14) |
| | Distribution : USER | Uncontrolled Document |

BNC Straight Plug
for PIC Cable T556124 or RG393



PERFORMANCE

| | |
|-----------------------|--------------|
| Nominal Impedance | 50 Ohms |
| Frequency Range | 0 - 4 GHz |
| Voltage Rating | 500 VRMS |
| Insulation Resistance | 5000 Megohms |

CONNECTOR WEIGHT (Each)

1.08 ounces (30.62 grams)

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION

| | |
|--|--|
| Pic Die Set | MIL Spec Die Set |
| <i>Center Contact</i> | <i>Center Contact</i> |
| M22520 / 5 - 01 Tool, PIC 190218 Hex Crimp Die (.098 hex) | M22520 / 5-01 Tool, MIL Spec *M22520 / 5-25 (.100 B hex) |
| <i>Crimp Ferrule</i> | <i>Crimp Ferrule</i> |
| M22520 / 5 - 01 Tool, PIC 190218 Hex Crimp Die (.429/.450 hex) | M22520 / 5-01 Tool, MIL Spec *M22520 / 5-25 (.429 A hex) |

* Note - MIL Spec die to be used on the smaller diameter area of ferrule only. Not the larger "Bell" area on end.

CONSTRUCTION

Materials:

| | |
|----------------|--|
| Body | Brass, ASTM-B16, Alloy UNS 36000, H02 |
| Center Contact | Brass, ASTM-B16, Alloy UNS 36000, H02 |
| Ferrule | Brass, ASTM-B16, Alloy UNS 36000, Dead Soft, Weatherseals included |
| Dielectric | TFE Fluorocarbon, ASTM-D1710, Type 1, Grade 1 |

Finish :

| | |
|----------------|--------|
| Body, Ferrule | Nickel |
| Center Contact | Gold |

Applicable Standards

MIL-STD 348
MIL-PRF-39012

Notes :

- 1) A 2.5" piece of Raychem ATUM heat shrink P/N ATUM-19/6-0 provided with connector for purpose of strain relief & moisture protection.
- 2) Please refer to T-190XXX Termination Instruction sheet for strip dimensions & instructions.

PIC Wire & Cable Connector User specification sheets are non-controlled documents. Please contact PIC Wire and Cable or visit the PIC website (www.picwire.com) to ensure the latest revision of the drawing is being viewed.